

MB4

The AKG/Crown® MB4 is a miniature boundary microphone for multi-miking applications such as teleconferencing, distance learning, boardrooms, courtrooms, and security applications. Double-sided sticky tape is provided for attaching the unit under shelves, on walls, etc.

Thanks to its supercardioid pickup pattern, the MB4 greatly reduces ambient noise and pickup of room reverberation. The result is a clearer sound.

The MB4 has a 15-foot attached cable leading to an XLR-type output connector with built-in mic electronics. It is powered by 12-48V phantom power, and is low-impedance balanced.

Features

- Tiny, inconspicuous.
- Can be used without putting holes in the table.
- Clean, clear, natural sound.
- Low-Z balanced mic-level output prevents hum and high-frequency loss.
- Removable grille assembly can be painted.

How to Paint the Microphone

1. Using a small screwdriver, pry open one side of the base, then the other side
2. Remove the foam liner.
3. Wearing a dust mask, spray-paint the grille assembly. Be sure grille holes are not clogged.
4. Allow to completely dry.
5. Make sure the LED is properly aligned.
6. Carefully place the grille assembly over the base, and snap in place.

Installation

1. In a table, typical placement for each mic is an arm's length from the user. Install one microphone in front of each person, or one between every two people. If the microphone will be used on a lectern, install it on an open surface. Do not install in a cavity or recessed area as the frequency response and polar pattern will be degraded.
2. Orient the mic so the readable label faces the user (right-side-up).
3. Plug a mic cable with a female XLR-type connector into the power module. Connect the other end of the cable to a phantom power supply. Or if your mixer has phantom power, connect the mic cable directly to a mic input and turn on phantom power.

MINI-BOUNDARY™ MICROPHONE



Specifications

Type: Phase Coherent Cardioid.

Element: Electret condenser.

Frequency response (typical): 50 Hz to 15,000 Hz at 30 degrees incidence to surface (see Fig. 1).

Polar pattern: Half-supercardioid (supercardioid in the hemisphere above the primary boundary).

See Figs. 2 and 3.

Impedance: 150 ohms, balanced (recommended load impedance 1000 ohms or greater).

Open-circuit sensitivity (typical): 22 mV/Pa* (-33 dB re 1 volt/Pa).

Power sensitivity: -30.5 dB re 1 mW/Pa*.

EIA rating -125 dBm.

Equivalent noise level (self-noise): 22 dB SPL

typical (0 dB=0.0002 dyne/cm²), A-weighted.

S/N ratio: 72 dB at 94 dB SPL.

Maximum SPL: 120 dB SPL at 3% THD.

Polarity: Positive (inward) pressure on the diaphragm produces positive voltage on pin 2 with respect to pin 3.

Operating voltage: Phantom power, 12-48 volts DC on pins 2 and 3 with respect to pin 1 of output connector.

Current drain: 4 mA nominal.

Connector: 3-pin pro audio, XLR-M type.

Cable: Permanently attached, black, 15-foot (4.572 m), 2-conductor shielded cable from mic to power module or interface. No other cable supplied. Use two-conductor shielded mic cable from power module to mixer.

Materials: High-impact molded plastic and steel mesh mic grille, steel power module.

Finish: Satin black.

Net weight: 2.7 ounces (78 grams).

Operating temperature range: -10° to +50°C, or +14° to +122°F.

Net weight: Microphone: 0.7 ounces (19.8 grams)

Power module: 2.8 ounces (78.6 grams)

Dimensions: See Fig. 4.

Included accessories: Double-sided tape for fastening under shelves, etc., for theatrical applications.

Optional accessories: PH1A phantom power supply (1 channel, battery or DC-adaptor powered). PH4A phantom power supply (4 channels, AC powered).

Fig. 1. Frequency Response

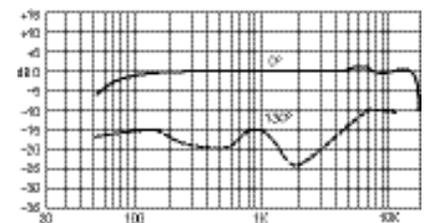


Fig. 2. Horizontal-Plane Polar Response


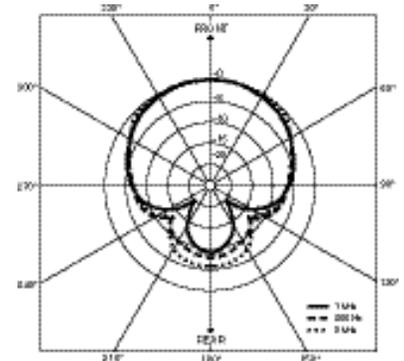


Fig. 3. Vertical-Plane Polar Response




*1 pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL.

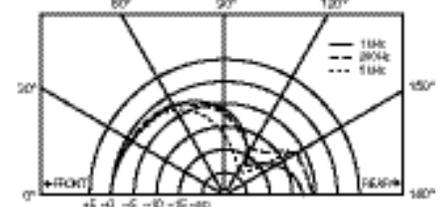

INSTALLED

MB4

Fig.4

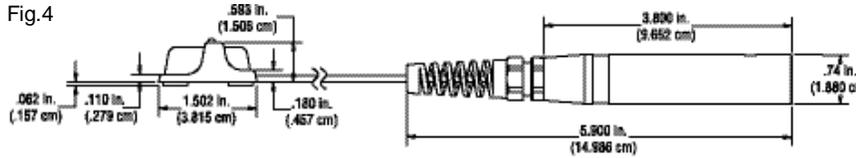

Architects' and Engineers' Specifications

The microphone shall be the AKG/Crown model MB4 or equivalent. The microphone shall be a half-supercardioid electret condenser type. The microphone shall use the principle of phase coherency achieved by mounting a small-diameter element very near a boundary. This eliminates comb filtering in the audible spectrum.

The microphone will exhibit excellent off-axis response and gain-before-feedback. The MB4 shall have a permanently attached 15-foot (4.572 m) cable connected to an XLR-type connector with built-in mic electronics. Powering shall be by 12-48V phantom power.

At the output connector, nominal sensitivity shall be 22 mV/Pa. Maximum SPL shall be 120 dB SPL for 3% THD. Equivalent noise shall be 22 dBA nominal. Frequency response shall be 50 Hz to 15 kHz with a uniform off-axis response, about 20 dB down at the rear nulls.

The AKG/Crown model MB4 is specified.

Warranty

AKG/Crown professional microphones are guaranteed against malfunction for a period of three years from date of original purchase. See enclosed warranty sheet for additional information.

Service

If the microphone does not function properly, check that it is aimed correctly and is connected as described in this data sheet. If there is hum or no signal, first repair or replace the cable. If you determine that the microphone product is defective, return the complete product in its original packaging to one of the addresses below. For further assistance or technical support call the international helpdesk at **+43 676 83200 888**.



AKG ACOUSTICS GMBH LAXENBURGER STRASSE 254, 1230 VIENNA/AUSTRIA
AKG ACOUSTICS, U.S. SERVICE 24950 GROVE VIEW ROAD, MORENO VALLEY, CA 92551, U.S.A

© 2015 HARMAN International Industries, Incorporated. All rights reserved. AKG is a trademark of AKG Acoustics GmbH, registered in the United States and/or other countries.

Features, specifications and appearance are subject to change without notice.

www.ake.com